

45cm

5M LENGTH (8 X 16 MM) AURIOTEK STRIPLIGHT

Please follow the instructions below in order to properly assemble and store your Auriotek Striplight.

Your Auriotek Striplight should include the following:

1 Auriotek Striplight

Accessories:

15 Transparent Plastic Snap-fit Clips



15 Screws

1 Glue

1 End Cap


1 Remote control (2 x AAA batteries are included)

The LED silicone light strip is manufactured using integrated silicone extrusion molding technology. It achieves an IP44 waterproof rating and features excellent resistance to salt, acids, alkalis, corrosive gases, fire, and UV rays. Suitable for indoor and outdoor decorative lighting, it can be applied to corridors, roof edges, and other architectural areas.

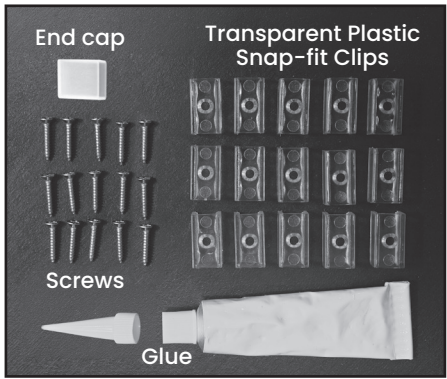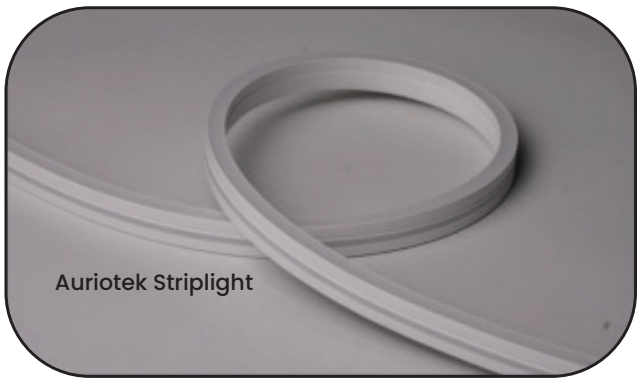

Remote control

PRODUCT DIMENSIONS:

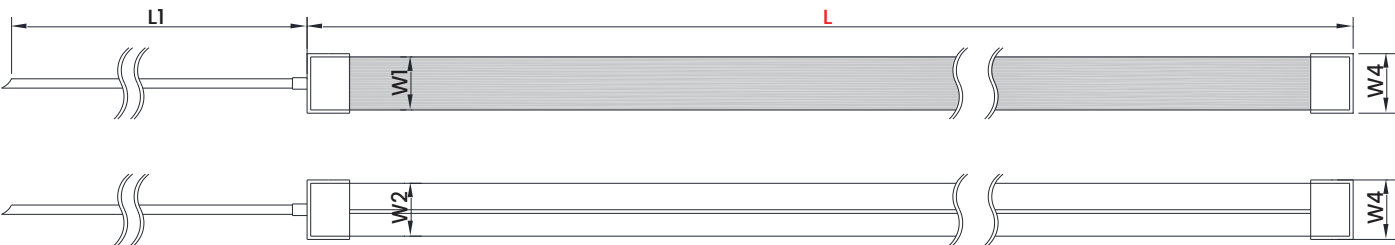

Model	Dimensions	Light emitting method	Strip type	Emitting surface	Product length L (m)	Bending direction	Waterproof rating
SILICONE0816	8 x 16 mm	Side-emitting	RGB	White	5 meter	Horizontal Bending	IP44

Number of LED beads	Minimum cutting length
84L / M	71.4 mm


APPLICATIONS:

- Architectural decoration:** Used for outline decorative lighting of buildings to enhance aesthetic appeal.
- Indoor decoration:** Outlining indoor items to elevate the overall ambiance and aesthetics.
- Gaming room ambiance:** Syncs with game audio effects for immersive lighting.
- Outdoor advertising:** Outlining the shapes of outdoor advertisement lettering.
- Smart control:** Supports remote control and scene switching via the Auriotek APP. It can be intelligently adjusted to meet user preferences, providing a comfortable light environment.


NOTES:

Safe input voltage: DC 24V


WIRING METHOD:

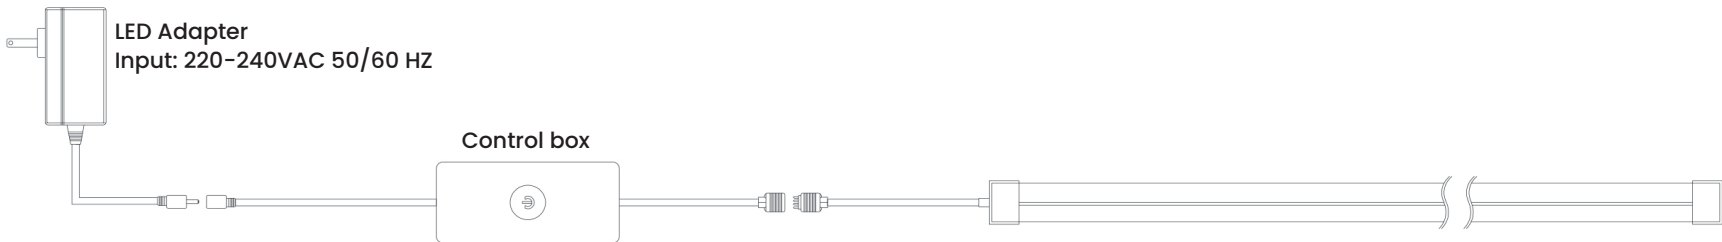

INSTALLATION ACCESSORIES

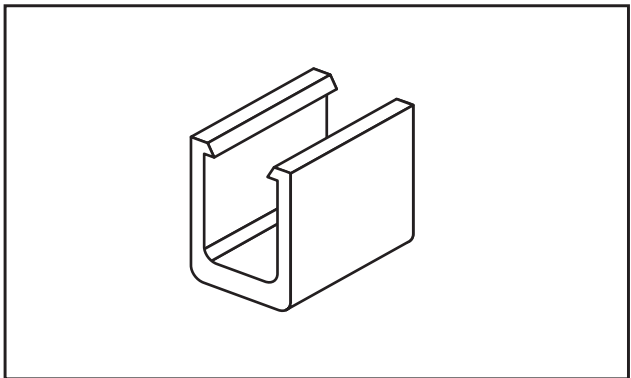


Transparent Plastic Snap-fit Clip
20 x 11 x 11.2 mm (L x W x H)

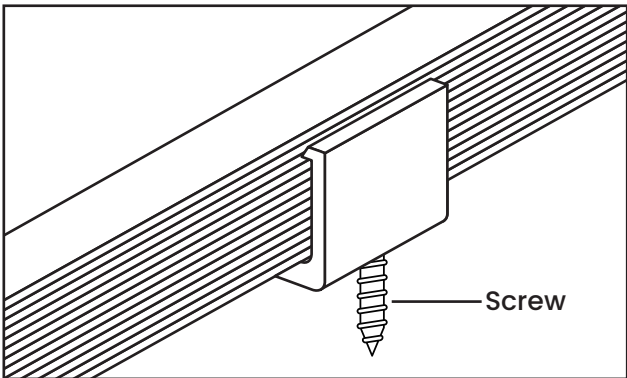


AU26


Please cut at the Cutting Mark:

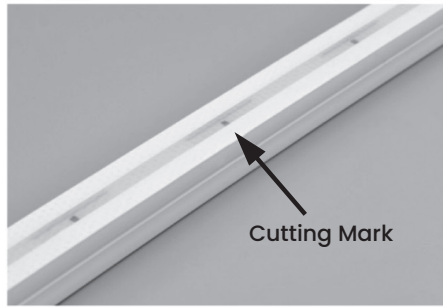


Note: There is a transparent widow at the back, you can see the cutting mark.

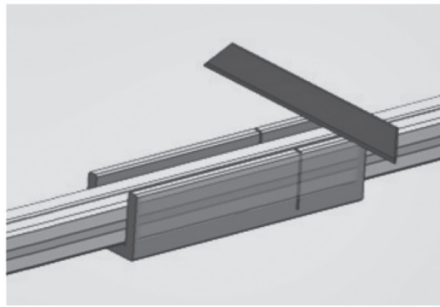


Use the tooling to cut the flex precisely at the cutting mark vertically.

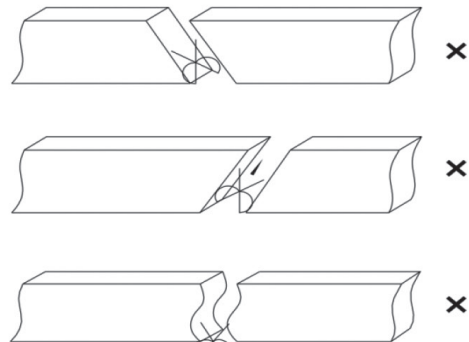


Do not cut as the pictures shows.




Apply glue evenly after cutting.



Push the end cap onto the light strip in the direction of the arrow.



Dry it with a heat gun or let it air dry naturally until it is securely installed.



Færdig montering af endedækslet. Completed appearance of the end cap installation.

REMOTE CONTROL OPERATION

Your Auriotek Striplight's Multiple lighting function capability is controlled by the use of the remote control provided, or by phone or tablet - by downloading the APP!



CONTROL BOX OPERATION

Short press the button on the control box to random switching function - per the listed functions below.

Red, Green, Blue, Pink, Purple, Pure White, Warm White, Multi color, Bug Light



Press & hold again the button the light will turn OFF.

Auriotek

Scan the below code to download APP



Scan the below QR code to read the APP instruction manual.



SELECTING COLOR & FUNCTION

Simply press a desired lighting function button - Per the listed functions below.

1. R-Red
2. G-Green
3. B-Blue
4. P-Pink
5. PU-Purple
6. W-White
7. 1- Mother' Day
8. 2- Father' Day
9. 3- Independence Day
10. 4- Halloween
11. 5- Christmas
12. 6- New Year's Eve
13. 7- Rainbow
14. 8- Multi Color
15. Bug - Bug Light
16. 6H - Turn on for 6 hours, turn off 18 hours
17. ◀ - VOL- 18. ▶ - VOL+
19. LightShow+1 - LightShow 1
20. LightShow+2 - LightShow 2
21. LightShow+3 - LightShow 3
22. LightShow+4 - LightShow 4
23. LightShow+5 - MusicShow 1 Happy Birthday
24. LightShow+6 - MusicShow 2 Halloween Horror
25. LightShow+7 - MusicShow 3 We Wish You A Merry Christmas
26. LightShow+8 - MusicShow 4 Wienerwald
27. WW - Warm White 28. ⏻ - Power

6H TIMER FEATURE:

- Press the "6H" button; the light set will flash **BLUE** 3 times - Indicating that the 6 hour "On" / 18 hour "Off" timer has now been activated.
- Note:** The light set will automatically resume back to the "On" position - 24 hours from when it was initially activated.
- Press the "6H" button again, the light set will flash **RED** 3 times - Indicating that the timer feature has now been deactivated.
- Note:** The light set On/Off operation is now controlled by either the manual operation of the remote control, APP, plug or by the control box.

TROUBLESHOOTING

- Failure to light; Unplug the product and check to see that the GFCI outlet is functioning.

STORAGE INSTRUCTIONS

- Leave assembled or store in the original carton.
- Store in cool, dry location away from sunlight.

Made in China
Printed in China
This is not a toy, for decorative use only.

38.1cm


45cm

5M LÆNGDE (8 X 16 MM) AURIOTEK STRIBLYS

Følg venligst instruktionerne nedenfor for korrekt at samle og opbevare din Auriotek Striblys.


Din Auriotek Strip light bør indeholde følgende:
1 Auriotek Striblys
Tilbehør:
15 gennemsigtige plastikclips
15 skruer
1 lim
1 endekappe
1 fjernbetjening (2 x AAA-batterier medfølger)

LED-silikonelysstrimlen er fremstillet ved hjælp af integreret silikonEEKstruderingsstøbningsteknologi. Den opnår en vandtæthedsklassificering i henhold til IP44 og har fremragende modstandsdygtighed over for salt, syrer, alkalier, ætsende gasser, ild og UV-stråler. Den er velegnet til indendørs og udendørs dekorativ belysning og kan anvendes på korridorer, tagkanter og andre arkitektoniske områder.

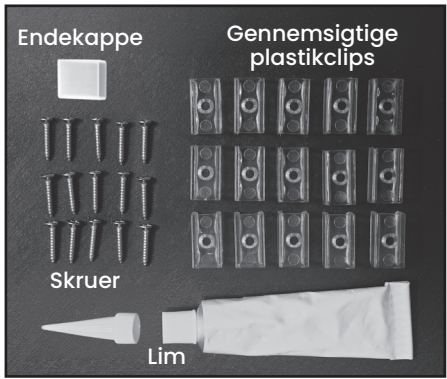

Fjernbetjening

PRODUKTETS DIMENSIONER:

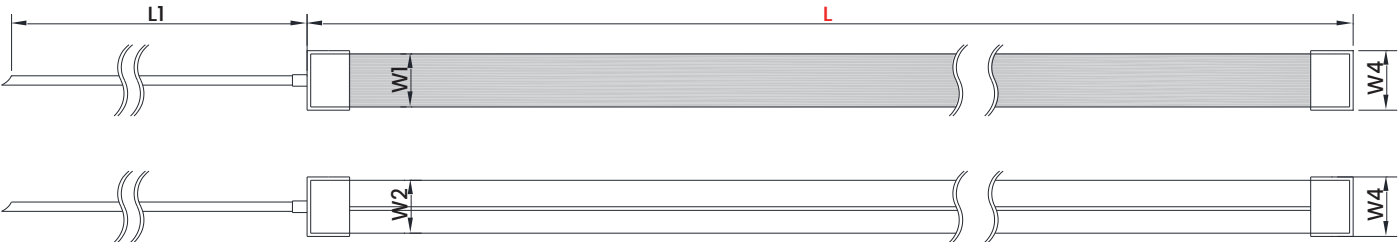

Model	Dimensioner	Lysudsendende metode	Strimletype	Udsender overflade	Produktlængde L (m)	Bøjningsretning	Vandtæthedsklassificering
SILICONE0816	8 x 16 mm	Sideemitterende	RGB	Hvid	5 meter	Horisontal bøjning	IP44

Antal LED-perler	Minimum skærelængde
84L / M	71,4 mm


ANVENDELSER:

- Arkitektonisk udsmykning:** Bruges til dekorativ belysning af bygninger for at forbedre den æstetiske appel.
- Indendørs udsmykning:** Fremhæver indendørs elementer for at forbedre den overordnede atmosfære og æstetik.
- Atmosfære i spillelokalet:** Synkroniseres med spillelydeffekter for fordybende belysning.
- Udendørs reklame:** Fremhæver formerne på udendørs reklamebogstaver.
- Smart styring:** Understøtter fjernbetjening og sceneskift via Auriotek-appen. Den kan intelligently justeres for at imødekomme brugerens præferencer og give et behageligt lysmiljø.


NOTER:

Sikker indgangsspænding: DC 24V


LEDNINGSMETODE:

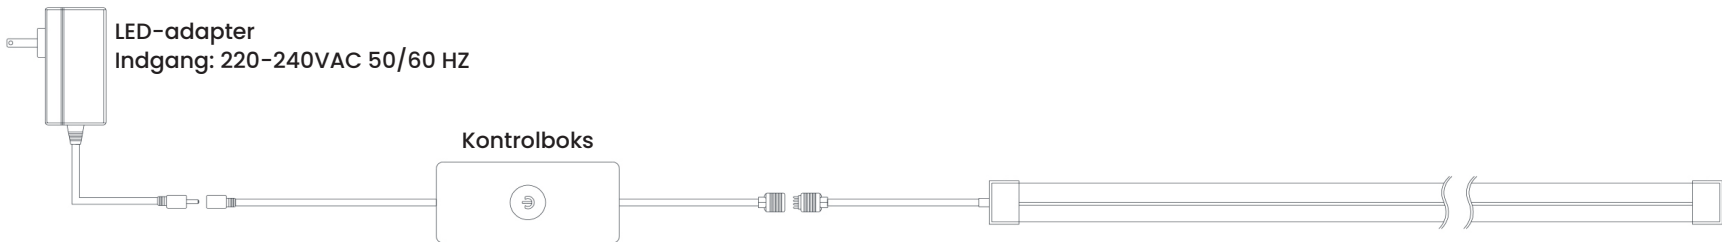

INSTALLATIONSTILBEHØR

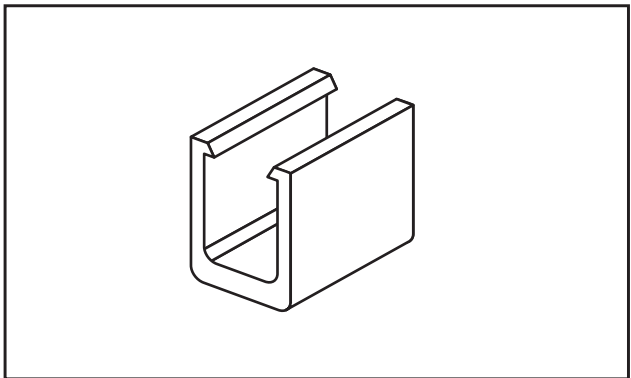


Gennemsigtig plastikklips med kliklås
20 x 11 x 11,2 mm (L x B x H)

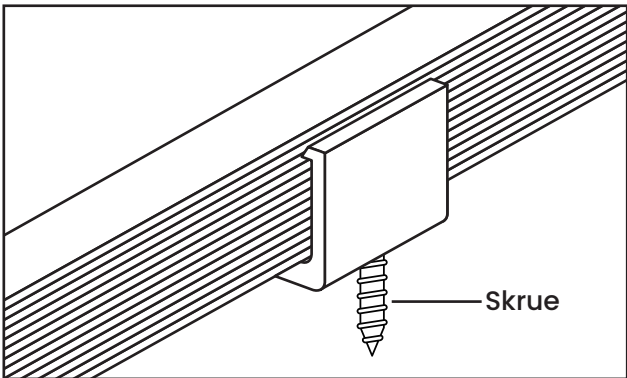


AU26


Skær venligst ved skæremærket:

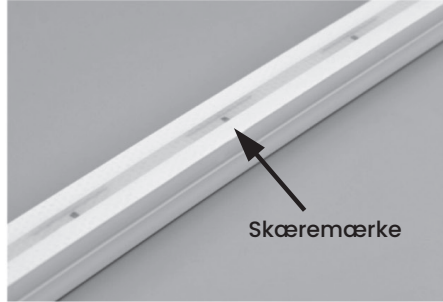


Bemærk: Der er en gennemsigtig kant bagpå, hvor du kan se skæremærket.

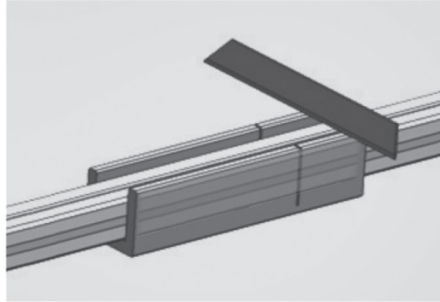


Brug værktøjet til at skære fleksen præcist ved skæremærket lodret.

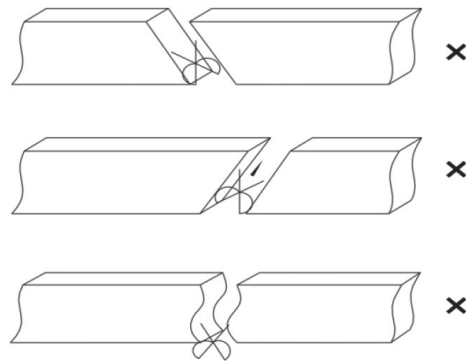


Klip ikke som billederne viser.




Påfør lim jævnt efter skæring.



Skub endestykket på lysstrimlen i pilens retning.



Tør det med en varmepistol, eller lad det lufttørre naturligt, indtil det er sikkert monteret.



Færdig montering af endedækslet.

FJERNBETJENING

Din Auriotek Striplights multiple belysningsfunktioner styres ved hjælp af den medfølgende fjernbetjening eller via telefon eller tablet - ved at downloade appen!



BETJENING AF KONTROLBOKSEN

Tryk kort på knappen på kontrolboksen for at aktivere tilfældig skiftefunktion - i henhold til de nedenfor anførte funktioner.

Rød, Grøn, Blå, Pink, Lilla, Ren hvid, Varm hvid, Flerfarvet, Insektlampe



Tryk på knappen igen, og hold den nede, så slukker lyset.

Auriotek

Scan nedenstående kode for at downloade APP'en



Scan QR-koden nedenfor for at læse appen's instruktionsmanual.



VALG AF FARVE OG FUNKTION

Tryk blot på en ønsket lysfunktionsknop - i henhold til de nedenfor anførte funktioner.

- | | |
|---|---------------------------|
| 1. R-Rød | 2. G-Grøn |
| 3. B-Blå | 4. P-Lyserød |
| 5. PU-Lilla | 6. W-Hvid |
| 7. 1- Mors Dag | 8. 2- Fars Dag |
| 9. 3- Uafhængighedsdag | 10. 4- Halloween |
| 11. 5- Jul | 12. 6- Nytårsaften |
| 13. 7- Regnbue | 14. 8- Flerfarvet |
| 15. Bug - Insektlys | |
| 16. 6H - Tænd i 6 timer, sluk i 18 timer | |
| 17. <- - Lavere Lydstyrke | 18. >- - Højere Lydstyrke |
| 19. LightShow+1 - Lysshow 1 | |
| 20. LightShow+2 - Lysshow 2 | |
| 21. LightShow+3 - Lysshow 3 | |
| 22. LightShow+4 - Lysshow 4 | |
| 23. LightShow+5 - Musikshow 1 Tillykke Med Fødselsdagen | |
| 24. LightShow+6 - Musikshow 2 Halloween-gyser | |
| 25. LightShow+7 - Musikshow 3 | |
| Vi Ønsker Dig En Glædelig Jul | |
| 26. LightShow+8 - Musikshow 4 Wienerwald | |
| 27. WW - Varm Hvid | 28. <- - Magt |

6H TIMERFUNKTION:

- Tryk på knappen "6H". Lyset blinker **BLÅ** 3 gange - Dette indikerer, at timeren for 6 timer "Tændt" / 18 timer "Sluk" nu er aktiveret.
- Bemærk:** Lyset vil automatisk vende tilbage til "Tændt"-positionen - 24 timer efter, at det oprindeligt blev aktiveret.
- Tryk på knappen "6H" igen, lyset vil blinke **RØDT** 3 gange - hvilket indikerer, at timerfunktionen nu er deaktiveret.
- Bemærk:** Lysets tænd/sluk-funktion styres nu enten manuelt via fjernbetjeningen, appen, stikket eller via kontrolboksen.

FEJLFINDING

- Lyser ikke; Tag stikket ud af produktet, og kontroller, at HFI-stikkontakten fungerer.

OPBEVARINGSINSTRUKTIONER

- Lad det stå samlet eller opbevar det i den originale karton.
- Opbevares køligt og tørt, beskyttet mod sollys.

Lavet i Kina
Trykt i Kina
Dette er ikke legetøj, kun til dekorativ brug.

38.1cm